
THIS IS A C.A.D. GENERATED DRAWING DD NDT MAKE MANUAL REVISIONS TD MASTER.




\* UNLESS OTHERWISE SPECIFIED TOLERANCES ON DECIMAL IS: ANGLE X.\*  $\pm 2^{\circ}$ UNIT: MM X.X\*  $\pm 0.05^{\circ}$ X.X\*  $\pm 0.38$ X.XX  $\pm 0.25$ X.XXX  $\pm 0.13$ 

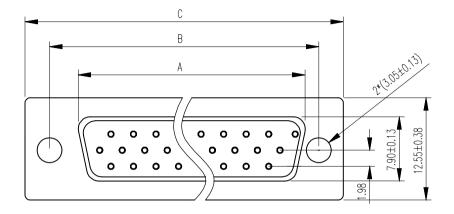


Ordering Info	Dimensions(mm)				
Part Number	SIZE	A±0.25	B±0.13	C±0.38	D±0.25
MHHDBC15-SS	15	16.33	24.99	30.81	19.28
MHHDBC26-SS	26	24.66	33.32	39.14	27.65
MHHDBC44-SS	44	38.38	47.04	53.04	41.30
MHHDBC62-SS	62	54.84	63.50	69.32	57.44

## Order Codes:

Soc	Socket Connector				
15	2101-0390-11	MHHDBC15-SS			
26	2101-0390-12	MHHDBC26-SS			
44	2101-0390-13	MHHDBC44-SS			
62	2101-0390-14	MHHDBC62-SS			

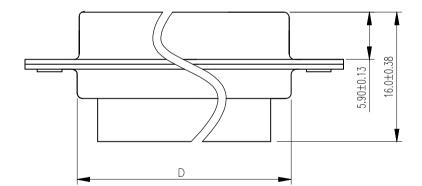



## 1. MATERIALS AND FINISH

 SHELL: STEEL MATERIAL, FRONT TIN FINISHED BACK SHELL TIN FINISHED.
INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED, BLACK COLOR.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MH CONNECTORS LTD. AND SHALL NOT	DRAWN H
BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	APPRO\

MH CONNECTORS LTD.

2	HALEY		11-14-13		
Г	APPROVED		DATE		
	SCALE	SHEET	OF	REV:	
		1 OF 1		4.0	
	DRAWING No				
	MHHDBCXX-SS				

DATE

THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/95/EC AND 2002/96/EC FOR RoHS COMPLIANCY.

