

VC7000 Series- General Specification

n APPROVALS

RALTRON	CUSTOMER
Eng. approval, date: Luis Vargas 12/09/02	Name (please print):
Sales approval, date: Tod Raphaely Dec 9,02	Title (please print):
Created by, date:	Signature, date:
Revision:	

n ELECTRICAL SPECIFICATION:

Note 1: measurements are done @ Tamb = +25°C = 15 pF to ground; unless otherwise noted

Note 2: Fo is the actual output frequency measured during Accuracy test


Note 2: frequencies above 52 MHz use straight multiplication design

PARAMETER	SYMBOL	CONDITIONS	VALUE	UNIT
Frequency, nom	fn	-	1.000.....160.000	MHz
Supply voltage, nom.	Vcc	Vcc±5%	3.3VDC 5.0VDC	VDC
Supply current	Is	-	25.0.....60.0	mA
Freq. stability vs. temperature, max.	$\Delta f/f_c$ (Ta)	(ref. to +25°C)	SEE PART NUMBER GENERATION TABLE	ppm
Freq. stability vs. supply changes, max.	$\Delta f/f_c$ (ΔV_s)	Supply change, ±5%	±5.0	ppm
Freq. stability vs. load changes, max.	$\Delta f/f_c$ ($\Delta load$)	Load change, ±10%	±3.0	ppm
Aging characteristics, max.	$\Delta f/f_c$ (Δt)	$\Delta t=1^{st}$ year	±4.0	ppm
	$\Delta f/f_c$ (Δt)	Δt =per year thereafter	±2.0	ppm
HCMOS output levels	VOH / VOL	-	2.97 / 0.3 4.5 / 0.5	V
Duty cycle	DC	@ 50%Vcc	SEE PART NUMBER GENERATION TABLE	%
Rise- / fall time, max.	tr / tf	20%~80% Vout, 80%~20% Vout	2.0...10.0 (see note A)	ns
Control voltage range	Vc	DC	0...+3.3 +0.5...+4.5	V
Pullability	$\Delta F/F_o$	-	SEE PART NUMBER GENERATION TABLE	ppm
Linearity, max.	$\Delta f/V$	Positive slope	≤ 10	%
Input impedance, min.	Zin	-	≥ 10	K Ω
Modulation freq. bandwidth, min.	MBW (-3dB)	-	≥ 10	KHz
Operating temperature range	Ta	-	SEE PART NUMBER GENERATION TABLE	°C
Storage temperature range	T(stg)	-	-45...+120	°C
Absolute voltage ranges	Vcc,Vc(abs)	Non-destructive, DC	-0.5...+7.0	V

n MECHANICAL SPECIFICATION

RALTRON ELECTRONICS CORP. § 10651 N.W. 19th St § Miami, Florida 33172 § U.S.A.

Tel: +001(305) 593-6033 § Fax: +001(305)594-3973 § e-mail: sales@raltron.com § internet: http://www.raltron.com

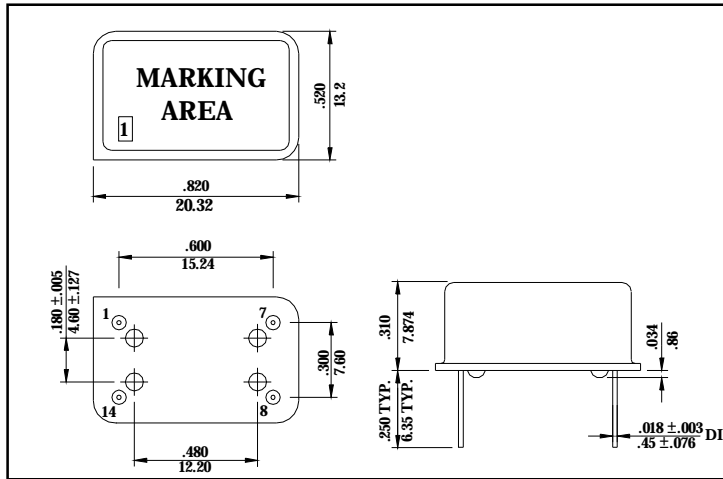


OUTLINE TOLERANCE:

±0.015" / 0.4mm
(Unless otherwise specified)

PIN OUT

Pin # 1 is the Control Voltage
Pin # 7 is the Ground, Case
Pin # 8 is the Output
Pin # 14 is the Supply Voltage, Vcc

■ **TYPICAL PHASE NOISE FOR FUNDAMENTAL MODE FREQUENCY**

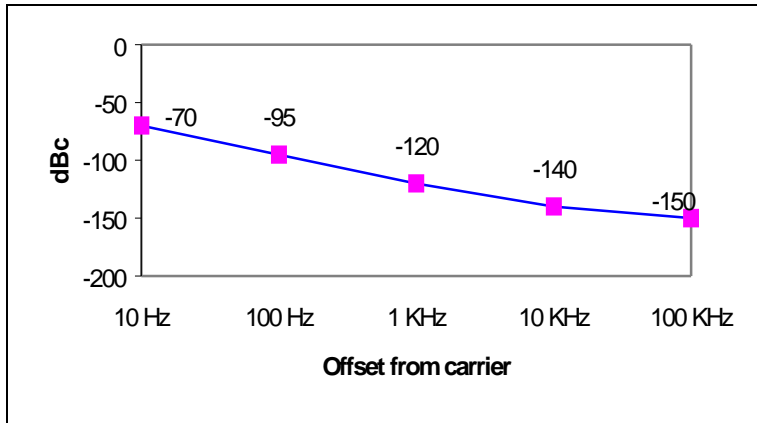

■ **PART NUMBERING SYSTEM**

14 PIN DIP SERIES	STABILITY OVER TEMPERATURE	REVISION LEVEL	TEMPERATURE RANGE (°C)	MINIMUM PULLABILITY (Over control voltage range)	FREQUENCY (MHz)	SYMMETRY
VC72: 5.0V HCMOS VC74: 3.3V HCMOS	10: ±15 ppm 15: ±15 ppm 20: ±20 ppm 25: ±25 ppm 50: ±50 ppm 00: ±100 ppm	Assigned	LV: 0...+50 LZ: 0...+70 HZ: -20...+70 D3: -40...+85	50: ±50 ppm 100: ±100 ppm 150: ±150 ppm 200: ±200 ppm	1.00 to 160.00	Blank:40%...60% T: 45%...55% (Tight)

NOTE: Variations from standard specification are available, please contact factory.
All combinations of Stability Vs. Temperature range might not be available, please contact factory.

EXAMPLE: VC7425A-LZ-100-16.384-T