

**LED DOT MATRIX**
**BL-M40X571**
**Features:**

- Ø 106.50mm (4.0") 10.0 dot matrix LED display.
- Ø Low current operation.
- Ø Excellent character appearance.
- Ø Easy mounting on P.C. Boards or sockets.
- Ø I.C. Compatible.
- Ø ROHS Compliance.


**Super Bright**
**Electrical-optical characteristics: (Ta=25°C) (Test Condition: IF=20mA)**

Part No			Chip			VF Unit:V		Iv
Row Cathode	Column Anode	Row Anode	Emitted Color	Material	$\lambda_p$ (nm)	Typ	Max	TYP.(mcd)
BL-M40C571S-XX		BL-M40D571S-XX	Hi Red	GaAlAs/GaAs,SH	660	1.85	2.20	200
BL-M40C571D-XX		BL-M40D571D-XX	Super Red	GaAlAs/GaAs,DH	660	1.85	2.20	232
BL-M40C571UR-XX		BL-M40D571UR-XX	Ultra Red	GaAlAs/GaAs,DDH	660	1.85	2.20	270
BL-M40C571E-XX		BL-M40D571E-XX	Orange	GaAsP/GaP	635	2.10	2.50	180
BL-M40C571Y-XX		BL-M40D571Y-XX	Yellow	GaAsP/GaP	585	2.10	2.50	180
BL-M40C571G-XX		BL-M40D571G-XX	Green	GaP/GaP	570	2.20	2.50	190

**Ultra Bright**
**Electrical-optical characteristics: (Ta=25°C) (Test Condition: IF=20mA)**

Part No		Chip			VF Unit:V		Iv
Row Cathode	Column Anode	Emitted Color	Material	$\lambda_p$ (nm)	Typ	Max	TYP.(mcd)
BL-M40C571UHR-XX	BL-M40D571UHR-XX	Ultra Red	AlGaInP	645	2.10	2.50	270
BL-M40C571UE-XX	BL-M40D571UE-XX	Ultra Orange	AlGaInP	630	2.10	2.50	230
BL-M40C571YO-XX	BL-M40D571YO-XX	Ultra Amber	AlGaInP	619	2.10	2.50	230
BL-M40C571UY-XX	BL-M40D571UY-XX	Ultra Yellow	AlGaInP	590	2.10	2.50	230
BL-M40C571UG-XX	BL-M40D571UG-XX	Ultra Green	AlGaInP	574	2.20	2.50	250
BL-M40C571PG-XX	BL-M40D571PG-XX	Ultra Pure Green	InGaN	525	3.80	4.50	300
BL-M40C571B-XX	BL-M40D571B-XX	Ultra Blue	InGaN	470	2.70	4.20	180
BL-M40C571W-XX	BL-M40D571W-XX	Ultra White	InGaN	/	2.70	4.20	250

--XX: Surface / Lens color :

Number	0	1	2	3	4	5
Ref Surface Color	White	Black	Gray	Red	Green	
Epoxy Color	Water clear	White diffused	Red Diffused	Green Diffused	Yellow Diffused	

**Absolute maximum ratings (Ta=25°C)**

**LED DOT MATRIX**
**BL-M40X571**

Parameter	S	D	UR	E	Y	G	Unit
Forward Current $I_F$	25	25	25	25	25	30	mA
Power Dissipation $P_d$	60	60	60	60	60	65	mW
Reverse Voltage $V_R$	5	5	5	5	5	5	V
Peak Forward Current $I_{PF}$ (Duty 1/10 @1KHZ)	150	150	150	150	150	150	mA
Operation Temperature $T_{OPR}$	-40 to +80						°C
Storage Temperature $T_{STG}$	-40 to +85						°C
Lead Soldering Temperature $T_{SOL}$	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)						°C

**Absolute maximum ratings (Ta=25°C)**


Parameter	UHR	UE	YO	UY	UG	PG	B	W	Unit
Forward Current $I_F$	30	30	30	30	30	30	30	30	mA
Power Dissipation $P_d$	75	65	65	65	75	110	120	120	mW
Reverse Voltage $V_R$	5	5	5	5	5	5	5	5	V
Peak Forward Current $I_{PF}$ (Duty 1/10 @1KHZ)	150	150	150	150	150	150	100	100	mA
Operation Temperature $T_{OPR}$	-40 to +80								°C
Storage Temperature $T_{STG}$	-40 to +85								°C
Lead Soldering Temperature $T_{SOL}$	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)								°C

## LED DOT MATRIX


BL-M40X571

### Package configuration & Internal circuit diagram


#### BL-M40X571 Series

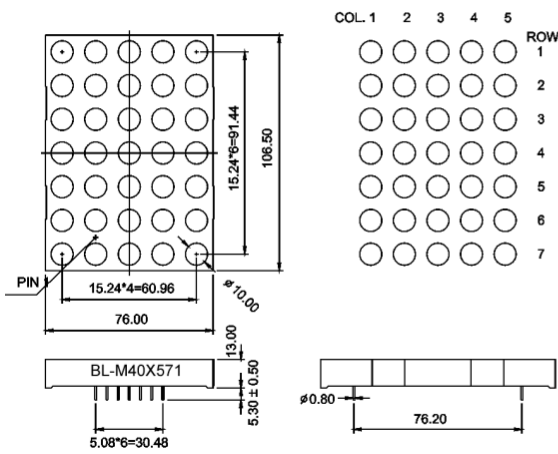

#### BL-M40C571

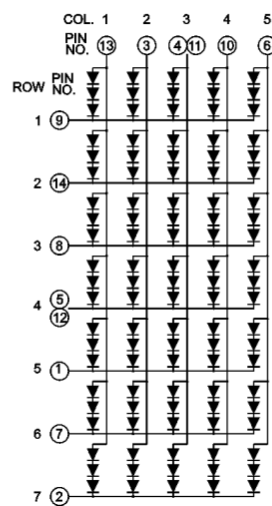

#### BL-M40D571

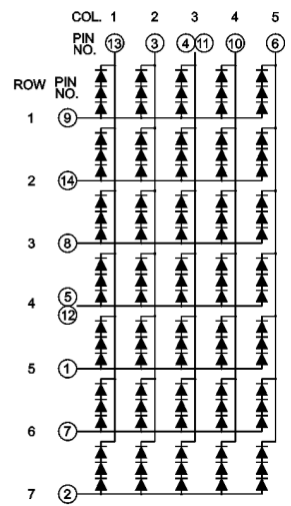


#### Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is  $\pm 0.25(0.01)$  unless otherwise noted.
3. Specifications are subject to change without notice.


**LED DOT MATRIX**

BL-M40X571


**Typical electrical-optical characteristics curves:**

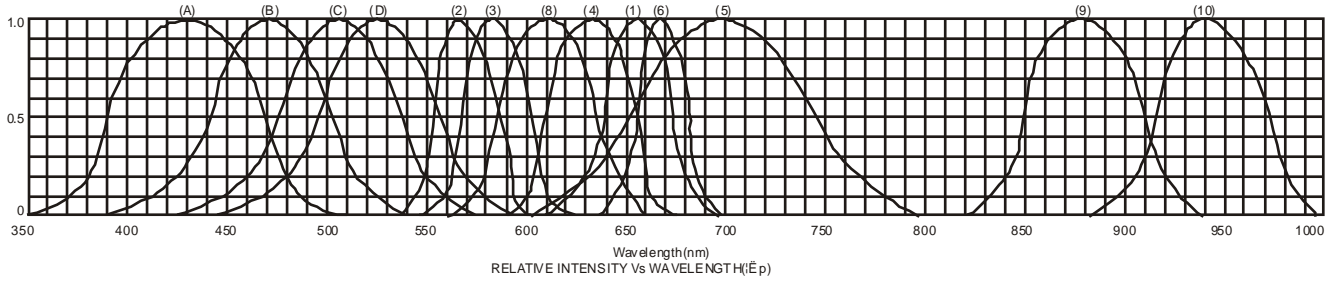


- (1) - GaAsP/GaAs 655nm/Red
- (2) - GaP 570nm/Yellow Green
- (3) - GaAsP/GaP 585nm/Yellow
- (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red
- (5) - GaP 700nm/Bright Red
- (6) - GaAlAs/GaAs 660nm/Super Red
- (8) - GaAsP/GaP 610nm/Super Red
- (9) - GaAlAs 880nm
- (10) - GaAs/GaAs & GaAlAs/GaAs 940nm
- (A) - GaN/SiC 430nm/Blue
- (B) - InGaN/SiC 470nm/Blue
- (C) - InGaN/SiC 505nm/Ultra Green
- (D) - InGaAlSiC 525nm/Ultra Green

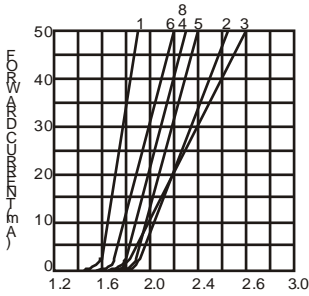


FORWARD VOLTAGE (Vf)  
FORWARD CURRENT VS.  
FORWARD VOLTAGE

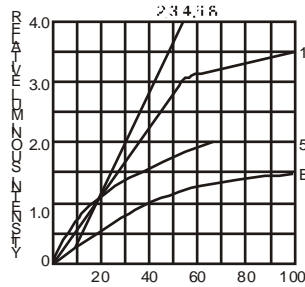


FORWARD CURRENT (mA)  
RELATIVE LUMINOUS  
INTENSITY VS. FORWARD  
CURRENT

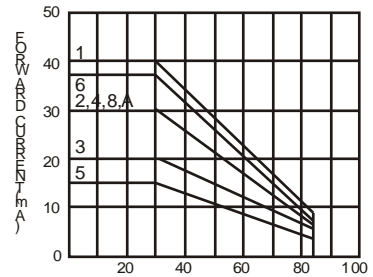


AMBIENT TEMPERATURE Ta ( °C )  
FORWARD CURRENT VS. AMBIENT  
TEMPERATURE

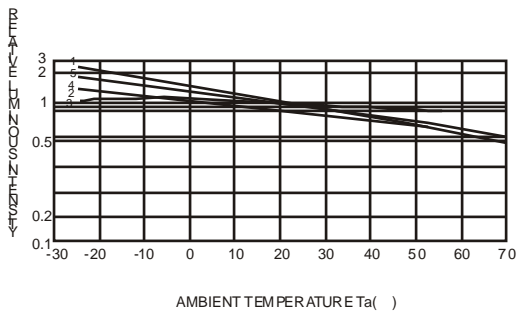

AMBIENT TEMPERATURE Ta ( °C )

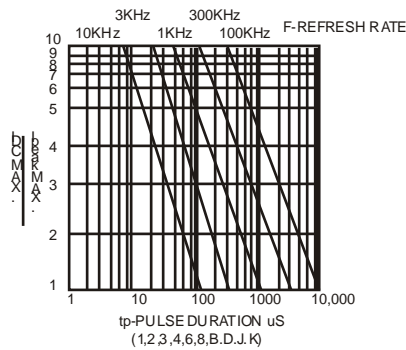

tp-PULSE DURATION  $\mu$ s  
(1,2,3,4,6,8,B,D,J,K)

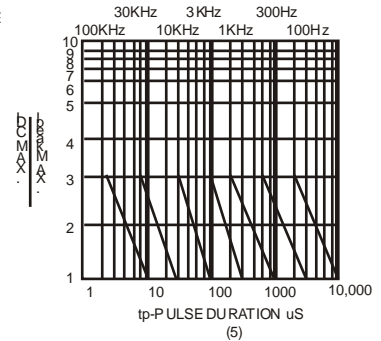

tp-PULSE DURATION  $\mu$ s  
(5)

NOTE:25 free air temperature unless otherwise specified