


J67 SERIES



MODULAR JACK CONNECTORS: 4 PORT RJ45 WITH LEDS, TAB UP RIGHT ANGLE PCB MOUNT, NON-SHIELDED, 2.54MM FOOTPRINT

Features:

- Top performance for high speed networking, voice and data applications
- Meet FCC PART 68, Subpart F requirements
- Available in Tab-up
- Applications: Telecommunications, Broadcast, Data Products
- RoHS Compliant

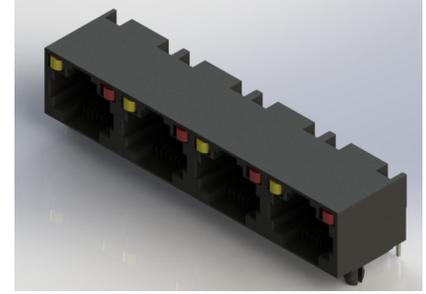

Specifications:


Housing Material	PBT or Nylon
Contact Material	Phosphor Bronze
Contact Plating	Gold Plating on contact area and Tin Plating on tails with Nickel underplating all over
Current Rating	1.5 amps @25°C
Voltage Rating	125 V AC
Contact Resistance	20 milliohms maximum
Dielectric Withstanding Voltage	1000 V AC
Insulation Resistance	500 megaohms minimum
Durability	750 cycles minimum
Operating Temperature	-40°C to +85°C
Wave Soldering Process	260°C ± 5°C, 5~10 Seconds

Ordering Code:

EXAMPLE PART NUMBER: J67048822P00011

SERIES: _____
RJ MODULAR JACK

HOUSING TYPE: _____
67-



NO. OF PORTS: _____
04 - 4 PORT

NO. OF CONTACTS PER PORT: _____
88 - 8P8C

CONTACT PLATING: _____
2 - GOLD FLASH
3 - 15 MICROINCHES OF GOLD
6 - 30 MICROINCHES OF GOLD
9 - 50 MICROINCHES OF GOLD

CONTACT TAIL TYPE: _____
2 - RIGHT ANGLE PCB

HOUSING MATERIAL: _____
P - PBT
N - NYLON

MOUNTING OPTIONS:

1 - BOARD LOCKS

PORT TYPE:

1 - SINGLE ROW (TAB UP)

SHIELDING:

0- NO SHIELD

RIGHT LED COLOR:

1 - YELLOW

2 - RED

3 - GREEN

4 - ORANGE

5 - BI-COLOR (GREEN/YELLOW)

6 - BI-COLOR (RED/GREEN)

7 - BI-COLOR (GREEN/ORANGE)

8 - BI-COLOR (RED/YELLOW)

LEFT LED COLOR:

1 - YELLOW

2 - RED

3 - GREEN

4 - ORANGE

5 - BI-COLOR (GREEN/YELLOW)

6 - BI-COLOR (RED/GREEN)

7 - BI-COLOR (GREEN/ORANGE)

8 - BI-COLOR (RED/YELLOW)